

RS485 4ILT interface



The new Somfy digital interface brings simplicity and comfort to Home Cinema addicts: in one click, your projector screen automatically positions itself in the appropriate format. This flexible interface is compatible with most control systems available on the market.

RS485 4ILT INTERFACE

Functions

- Memorize up to 8 formats
- Control up to 4 Somfy ILT motors
- Can be controlled by:
 - RS485 ⁽¹⁾
 - IR ⁽²⁾
 - Trigger up to 30V ⁽³⁾


⁽¹⁾ The interface has its own @ network

⁽²⁾ Compatible with universal remote controls, via IR Somfy sensors

⁽³⁾ Synchronisation of the screen with the video-projector

Technical specifications

| | |
|-------------------------------------|--|
| Supply (Nominal / Frequency) | From 90V to 255V AC - 50/60 Hz |
| Amps | 65 mA at 90V |
| | 30 mA at 255V |
| Connectors | RS485: 4 pin 3.5mm detachable terminal blocks |
| | IR: RJ9 |
| | Trigger: 2 pin 3.5mm detachable terminal blocks |
| | ILT motor: RJ9 |
| Temperature | From 0°C to 60°C |
| IP20 | |
| CE | |

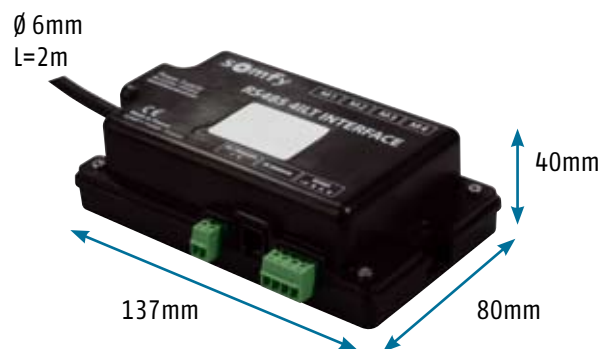

Wiring

