

RS485 4ILT interface



With the new Somfy digital interface, motorised roller shades can be easily integrated in a centralised control system.

- Up/Down command set individually.
- Bi-directional communication.

RS485 4ILT INTERFACE

Functions

- Memorise up to 8 scenarios with up to 4 Somfy ILT motors.
- Can be controlled by:
 - RS485 ⁽¹⁾
 - IR ⁽²⁾
 - Trigger up to 30V ⁽³⁾


⁽¹⁾ The interface has its own @ network

⁽²⁾ Compatible with universal remote controls, via IR Somfy sensors

⁽³⁾ Synchronisation of the screen with the video-projector

Technical specifications

Supply (Nominal / Frequency)	From 90V to 255V AC - 50/60 Hz
Amps	65 mA at 90V
	30 mA at 255V
Connectors	RS485: 4 pin 3.5mm detachable terminal blocks
	IR: RJ9 phone plug
	Trigger: 2 pin 3.5mm detachable terminal blocks
	ILT motor: RJ9
Temperature	From 0°C to 60°C
IP20	
CE - ROHS compliant	

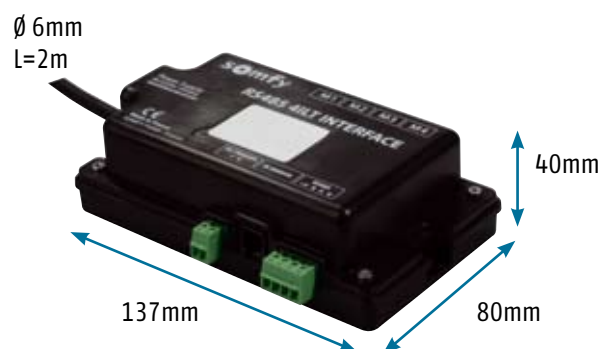

Wiring

